

VOL. 1

APPLICATIONS

SECTION 5

5.1 Classroom

5.2 Exam Room

5.3 Conference Room

5.4 Waiting Area

5.5 Toilet Room

5.6 Administrative Office

5.7 Dining Room


5.8 Patient Room

5.9 Corridor

5.1. Classroom




Floor Plan of Classroom

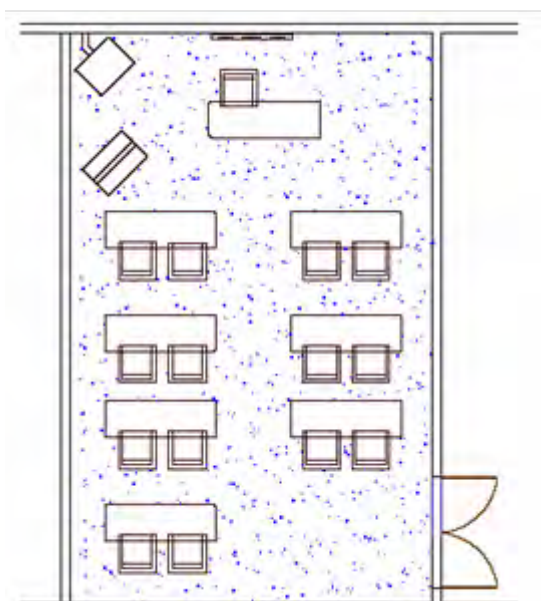


5.1.1 Application Guidelines for Classroom

- **Floors..... CPT-1, VCT-1**
Carpet or VCT can be used in classroom environments. The use of carpet reduces noise and helps to create a more inviting space.
- **Walls.....PT-1b**
Walls should be painted “Neutral” in color with eggshell finish. Architectural features should always be painted a Neutral color.
- **Ceilings.....ACT-1 or GYP**
- **Doors and frames.....PT-1d**
Doors and frames should be painted with semi-gloss for ease of maintenance.
- **Lighting.....2x2 Fluorescent**
Lighting does not appear on finish schedule. A 2x2 fluorescent fixture is recommended for Classrooms. Provide downlighting with dimming devices around perimeter of room.

5.2. Exam Room

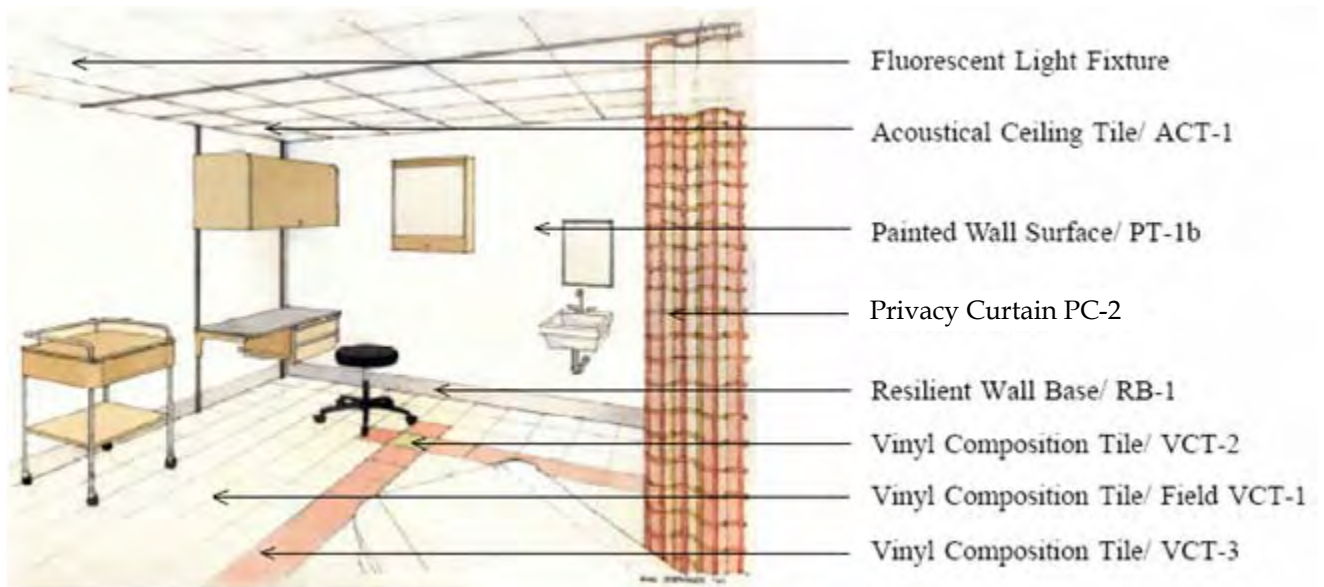


Floor Plan of Exam Room

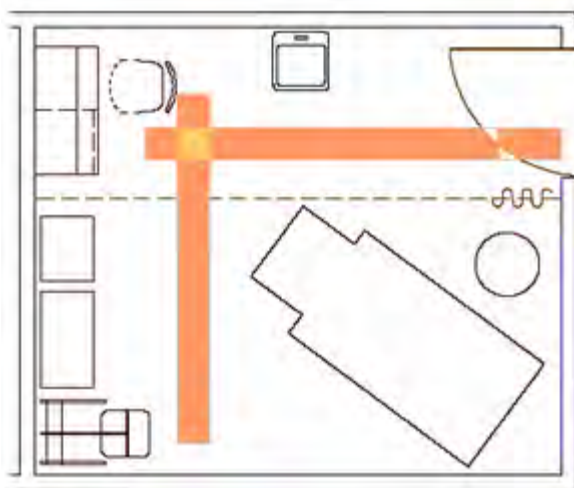


5.2.1 Application Guidelines for Exam Room

- **Floors..... VCT-1, VCT-2, VCT-3**
Vinyl composition tile using accent color tiles adds interest to the space.
Sheet vinyl can also be used in Exam Rooms.
- **Walls..... PT-1b**
Walls should be painted “Neutral” in color with eggshell finish. Architectural features should always be painted a Neutral color.
- **Ceilings..... ACT-1**
- **Doors and frames..... PT-1d**
Doors and frames should be painted with semi-gloss for ease of maintenance.
- **Lighting..... 2x2 Fluorescent**
Lighting does not appear on finish schedule. A 2x2 fluorescent fixture is recommended for Exam Rooms.

5.3. Conference Room

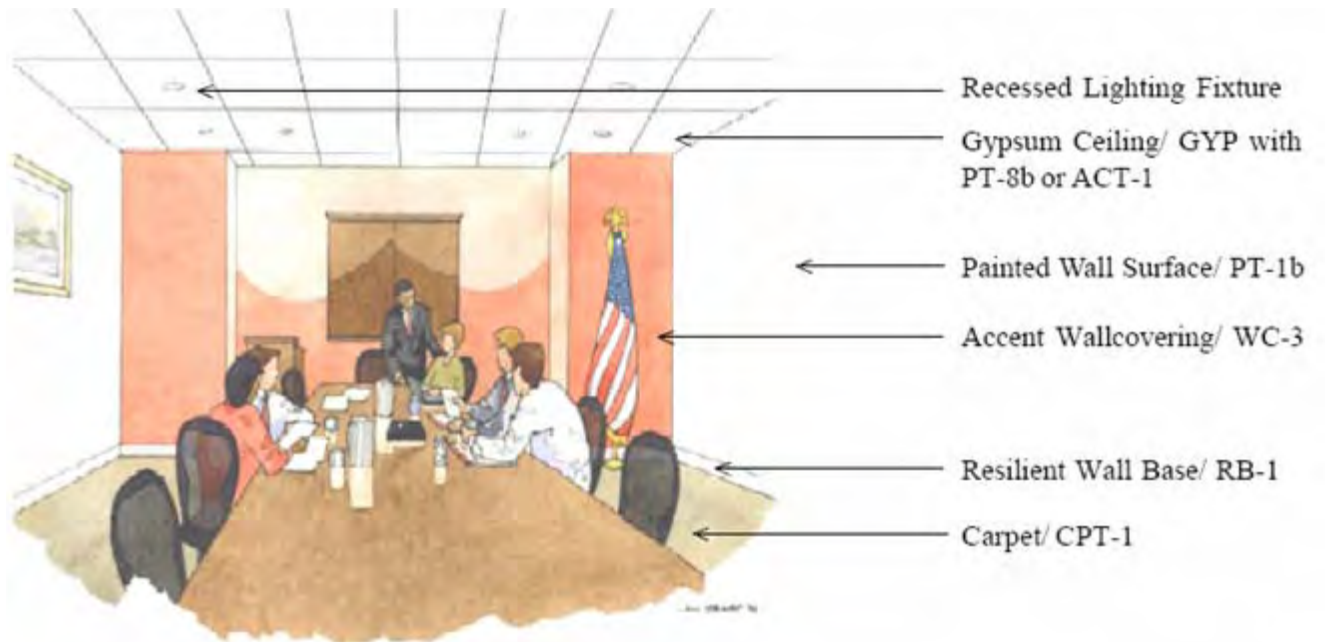

Floor Plan of Conference Room

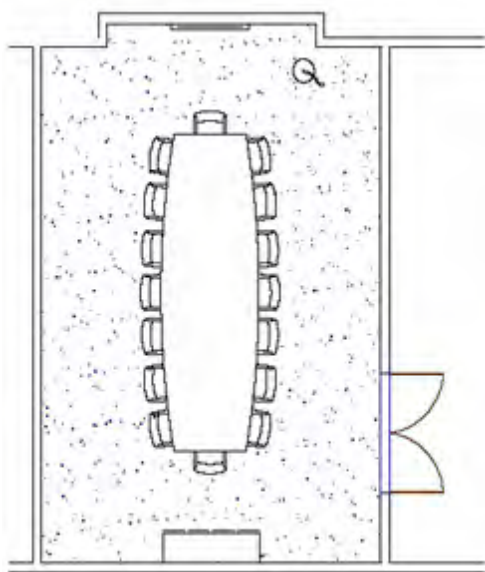

5.3.1 Application Guidelines for Conference Room

- **Floors..... CPT-1**
Carpet is used in Conference Rooms to reduce noise and create an inviting environment.
- **Walls..... WC-3, PT-1b**
Walls should be painted "Neutral" in color with eggshell finish. Architectural features should always be painted a Neutral color. When using an accent color only one wall is to be painted or have wallcovering in an accent color specified in this Volume. An alternative to using one wall, is to use an accent color below a chair rail. Chair rails should be installed at a height of 34"-36" from the floor surface, unless otherwise dictated by elements such as window sills. In Conference Rooms, the recommended wall should be to the front of the room.
- **Ceilings.....GYP/ PT-8b or ACT-1**
- **Doors and frames..... PT-1d**
Doors and frames should be painted with semi-gloss for ease of maintenance.
- **Lighting.....2x2 Fluorescent**
Lighting does not appear on finish schedule. A 2x2 fluorescent fixture is recommended for Conference Rooms. Provide downlighting with dimming devices around perimeter of room.

5.4. Waiting Area



Floor Plan of Waiting Area



5.4.1 Application Guidelines for Waiting Area

- **Floors..... CPT-1 and/or VCT-1, VCT-3, VCT-7, VCT-8**

Vinyl composition tile defines the major traffic pattern areas and adds interest to the space, assists with wayfinding, and supports design continuity by corresponding with patterns throughout the facility. Carpet can be used to define space and reduce noise.

- **Walls..... PT-1b, WC-3**
Walls should be painted “Neutral” in color with eggshell finish. Architectural features (i.e. handrails, door frames and window frames) should always be painted a Neutral color. One wall should have paint or wallcovering using an accent color recommended in this Volume. In the Waiting Area, the recommended accent wall is a side wall.

- **Ceilings..... ACT-1 or PT-8b**


- **Doors and frames..... PT-1d**
Doors and frames should be painted with semi-gloss for ease of maintenance.

- **Lighting..... 2x2 Fluorescent**
Lighting does not appear on finish schedule.

- **Cornice.....** Window treatments do not appear on finish schedules.

- *Although the Military Handbook 1191 allows carpet to be used as a floor finish in these areas, MEDCOM recommends substituting carpet with VCT with accent colors.*

5.5. Toilet Room

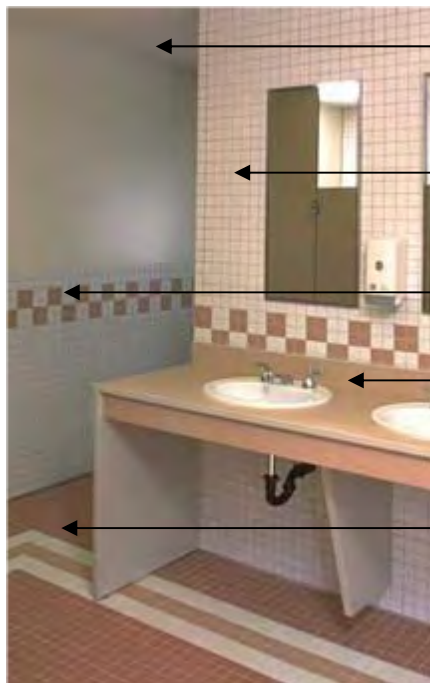

Gypsum Ceiling/ GYP with PT-8b


Ceramic Wall Tile/ CWT-1

Ceramic Wall Tile Accent Colors/
CWT-3

Solid Surface or Plastic Laminate/
SS-3 or PL-3

Ceramic Floor Tile


Floor Plan of Toilet Room

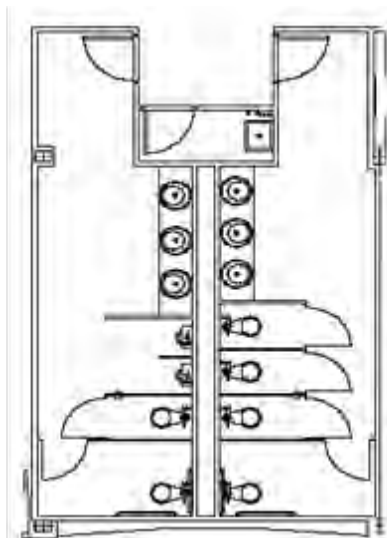


5.5.1 Application Guidelines for Toilet Room

- Floors..... CFT-1
- Walls..... PT-1d, CWT-1, CWT-4, CWT-5
Walls should be painted “Neutral” in color with semi-gloss finish. Any pattern in ceramic tile is to be simple in design.
- Ceilings..... GYP/ PT-8b
- Doors and frames..... PT-1d
Doors and frames should be painted with semi-gloss for ease of maintenance.
- Solid Surface..... SS-1 or PL-1
Solid Surface or PL-1 plastic laminate.
- Lighting..... 2x2 Fluorescent
Lighting does not appear on finish schedule.

5.6. Administrative Office

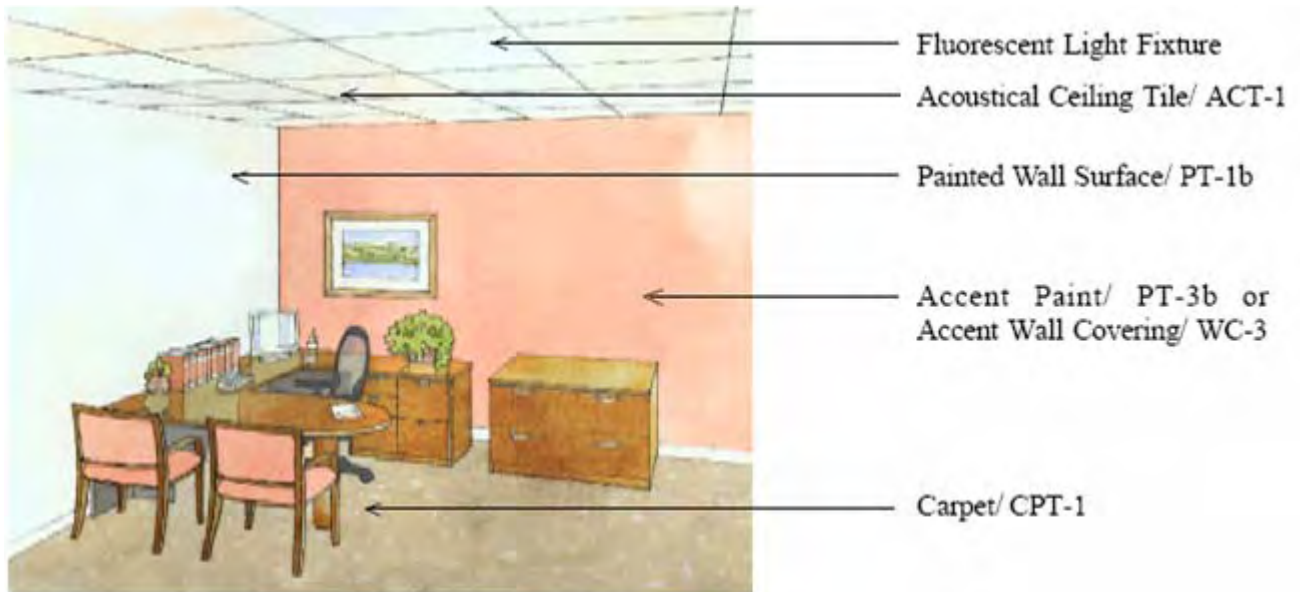


Floor Plan of Administrative Office

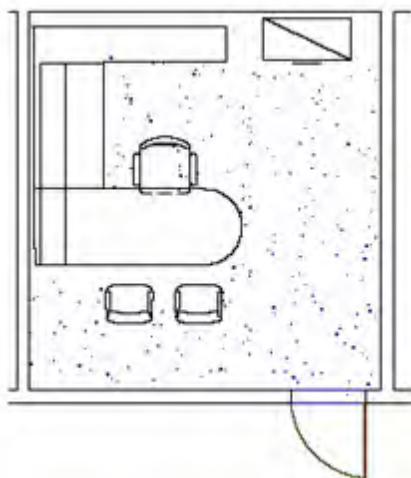


5.6.1 Application Guidelines for Administrative Office

- **Floors..... CPT-1**
Carpet is recommended for Administrative Areas.
- **Walls..... PT-1b with PT-3b or WC-3**
Walls should be painted "Neutral" in color with eggshell finish. One wall should have accent color paint or wallcovering recommended in this Volume. Typically the accent wall should be the wall facing you as you enter the room.
- **Ceilings..... ACT-1**
- **Doors and frames..... PT-1d**
Doors and frames should be painted with semi-gloss for ease of maintenance.
- **Lighting..... 2x2 Fluorescent**
Lighting does not appear on finish schedule.

5.7. Dining Room

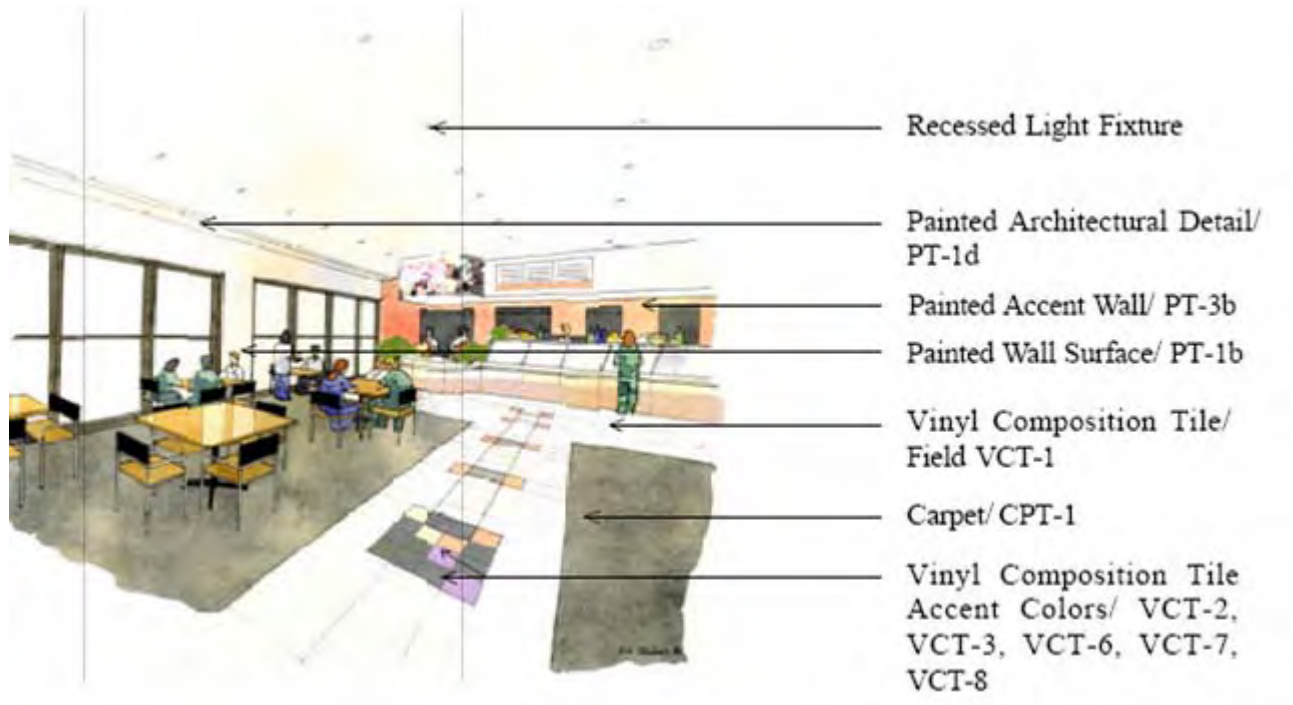

Floor Plan of Dining Room

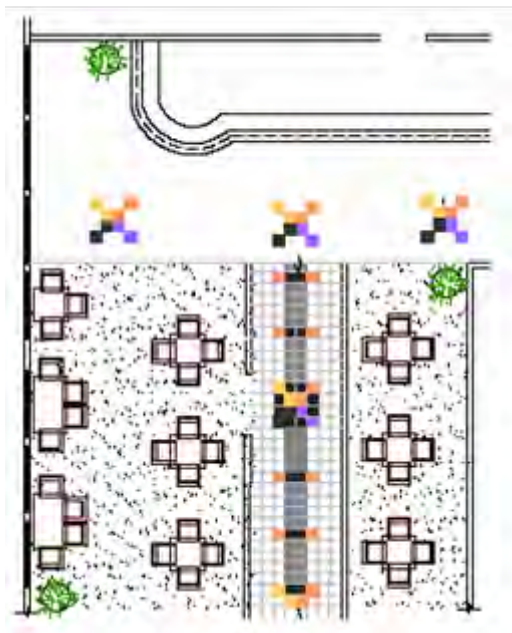

5.7.1 Application Guidelines for Dining Room

- **Floors**..... CPT-1 and/or VCT-1, VCT-2, VCT-3, VCT-6, VCT-7, VCT-8

Carpet can be used in Dining Areas to define the space. Vinyl composition tile should be used in major traffic areas and in front of servery. The use of accent colors in tile adds interest and supports design continuity throughout the facility.

- **Walls** PT-1b with PT-3b or WC-3

Walls should be painted "Neutral" in color with eggshell finish. One wall should have accent color paint, wallcovering or tile recommended in this Volume. Use of tile should be limited to the servery area only. Typically the accent wall should be the wall facing you as you enter the room.

- **Ceilings** ACT-1 or GYP/ PT-8b


- **Doors and frames**..... PT-1d

Doors and frames should be painted with semi-gloss for ease of maintenance.


- **Lighting** Recessed Lighting does not appear on finish schedule. Wall sconces can be used for accent lighting.

- *Although the Military Handbook 1191 allows carpet to be used as a floor finish in these areas, MEDCOM recommends substituting carpet with VCT with accent colors.*

5.8. Patient Room

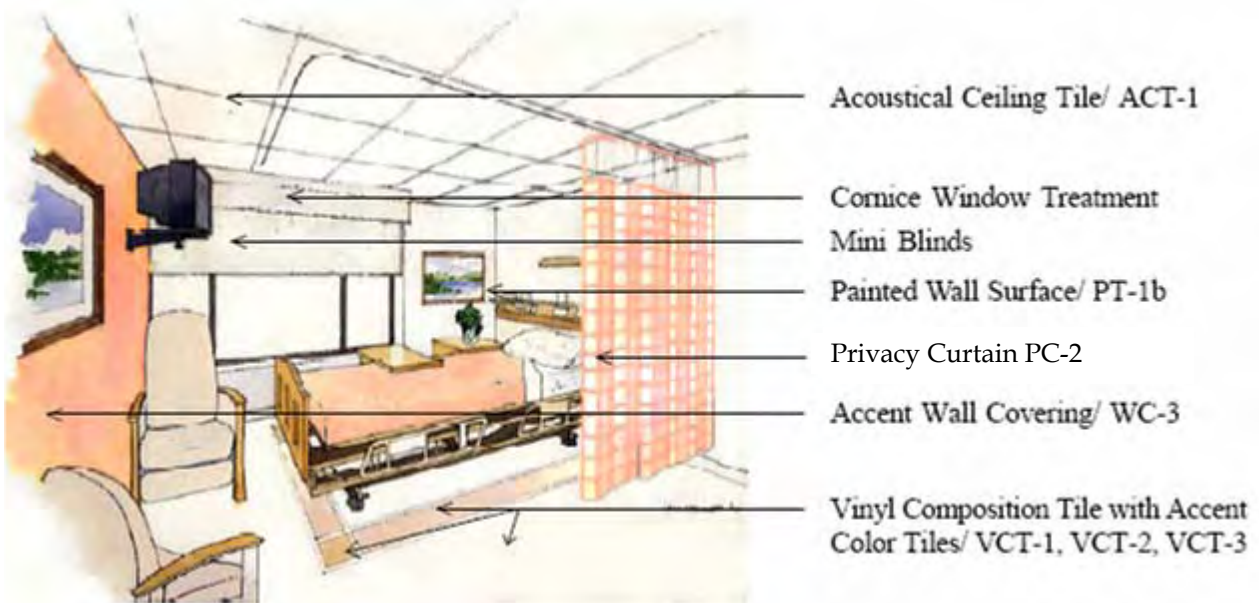


Floor Plan of Patient Room

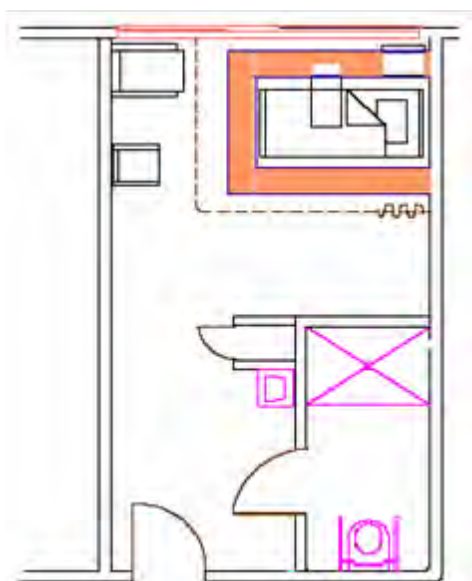


5.8.1 Application Guidelines for Patient Room

- **Floors..... VCT-1, VCT-2, VCT-3**
Vinyl composition tile using accent color tiles adds interest to the space.
- **Walls..... PT-1b with WC-3**
Walls should be painted “Neutral” in color with eggshell finish. One wall should be accent vinyl wall covering recommended in this Volume. Typically the accent wall of a patient room is the “foot wall” at the end of the patient bed.
- **Ceilings..... ACT-1**
- **Doors and frames..... PT-1d**
Doors and frames should be painted with semi-gloss for ease of maintenance.
- **Cubicle Curtains CC-2**
Patterns and colors should compliment the accent colors chosen for the area in which they will be installed. In smaller facilities, utilize solids or smaller patterns of the same color so as not to overpower the space.
- **Mini Blinds Do not appear on finish schedule.** Mini Blinds and window trim should be neutral in color. Cornices are recommended to be installed over the headrail.

5.9. Corridor

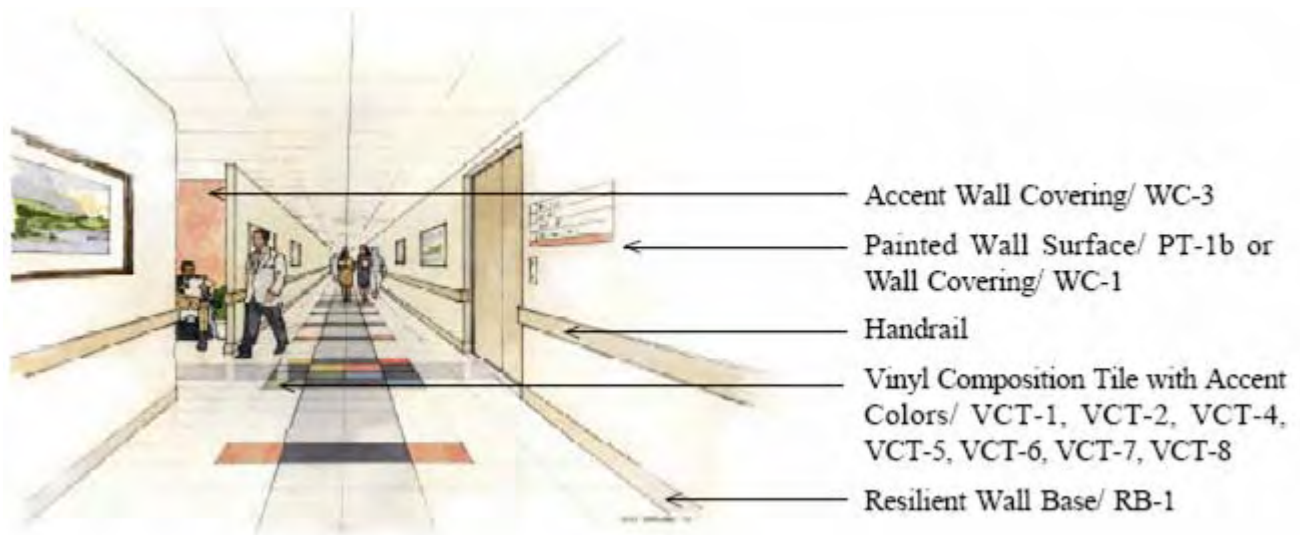

Floor Plan of Corridor

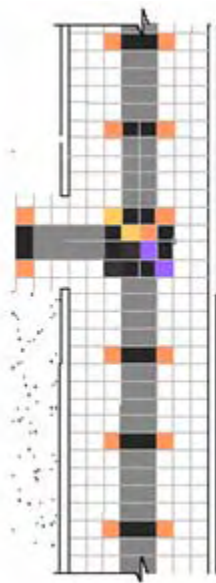

5.9.1 Application Guidelines for Corridor

- **Floors..... VCT-1, VCT-2, VCT-4, VCT-5, VCT-6, VCT-7, VCT-8**

Vinyl composition tile with accents tiles defines major traffic pattern areas, adds interest to the space, assists with wayfinding, and supports design continuity by corresponding with patterns throughout the facility. Large patterns incorporating all accent colors are recommended at the intersections of converging Corridors, elevator Lobbies, and in front of Nurses Stations. These patterns may also be achieved with other flooring finishes recommended in this Volume.

- **WallsPT-1b or WC-1, WC-3**

Corridor walls are neutral in color and finishes are recommended to be either protective wallcovering, paint or vinyl wallcovering. All architectural elements are to remain neutral in color (door and window frames, wall bases and handrails, cornices, etc.). An accent wall should be chosen with discretion so as not to overpower the space. Appropriate use of color would be a wall of a Waiting Area or on the end wall in a Corridor contributing to a comprehensive wayfinding system.

- **Ceilings.....ACT-1 or PT-8b**

- **Doors and frames.....PT-1d**

Doors and frames should be painted with semi-gloss for ease of maintenance.